

HSP


NOTES:
 Rated Current: 5.0AMP
 Contact Resistance: 20mΩ max
 Withstand Voltage: 1000V AC/Minute
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -25℃ to +85℃

Insulator Material: PA66 UL94V-0
 Used with: WF3963-T
 Mated with: WF3963-Wafer

Ordering Information

WF 3963 - H XX X 0 1

No. of pins Color
 02pin-1.0pin F=Beige
 W=White

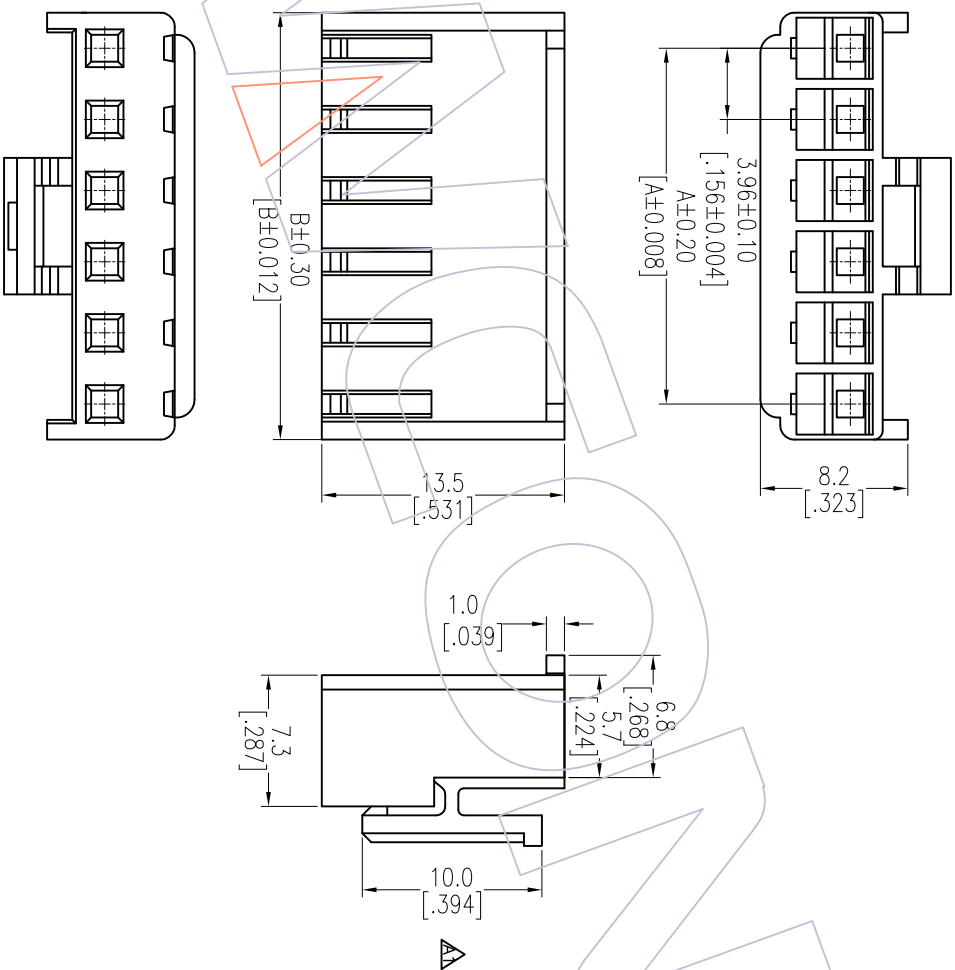

Specification & Ordering Information:

Circuit	Part No.	Dimension		Q'ty / Bag
		A	B/A	
02	WF3963-H02X01	3.96	8.32	1,000
03	WF3963-H03X01	7.92	12.28	1,000
04	WF3963-H04X01	11.88	16.24	1,000
05	WF3963-H05X01	15.84	20.20	1,000
06	WF3963-H06X01	19.80	24.16	500
07	WF3963-H07X01	23.76	28.12	500
08	WF3963-H08X01	27.72	32.08	500
09	WF3963-H09X01	31.68	36.04	500
10	WF3963-H10X01	35.64	40.00	500
11	WF3963-H11X01	39.60	43.96	500
12	WF3963-H12X01	43.56	47.92	500
13	WF3963-H13X01	47.52	51.88	500
14	WF3963-H14X01	51.48	56.04	500
15	WF3963-H15X01	55.44	60.00	500
16	WF3963-H16X01	59.40	63.96	500

OPERATION	SCALE	FIT
X.X	UNIT	mm
X.XX	SIZE	A4
X.XXX	SHEET	1/1
Angle	PROJ.	1st
± 3'		

DRAW	DATE	PART NO.
Lizufeng	2016/06/20	WF3963-HXXXX01
CHECK	DATE	TITLE:
		VH3.96 WAFER HOUSING
APPROVE	DATE	Customer NO.

WCON
 Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2016/06/20	MODIFY	
A0	2012/09/15	NEW	